

# DPBS(PG) College, Anoopshahr

BCA IV Semester

Subject: Computer Graphics

Paper Code: 401

## 3D Transformations in Computer Graphics

In Computer graphics, Transformation is a process of modifying and re-positioning the existing graphics.

3D Transformations take place in a three dimensional plane.

3D Transformations are important and a bit more complex than 2D Transformations.

Transformations are helpful in changing the position, size, orientation, shape etc of the object.

### Transformation Techniques-

In computer graphics, various transformation techniques are-

1. Translation
2. Rotation
3. Scaling
4. Reflection
5. Shear


**Translation** Consider a point object O has to be moved from one position to another in a 3D plane.

Let-

- Initial coordinates of the object O =  $(X_{old}, Y_{old}, Z_{old})$
- New coordinates of the object O after translation =  $(X_{new}, Y_{new}, Z_{old})$
- Translation vector or Shift vector =  $(T_x, T_y, T_z)$

Given a Translation vector  $(T_x, T_y, T_z)$ -

- $T_x$  defines the distance the  $X_{old}$  coordinate has to be moved.
- $T_y$  defines the distance the  $Y_{old}$  coordinate has to be moved.
- $T_z$  defines the distance the  $Z_{old}$  coordinate has to be moved.

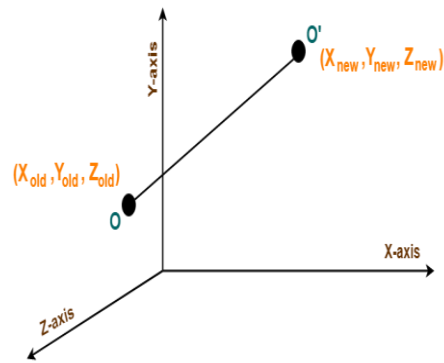

This translation is achieved by adding the translation coordinates to the old coordinates of the object as-

- $X_{new} = X_{old} + T_x$  (This denotes translation towards X axis)
- $Y_{new} = Y_{old} + T_y$  (This denotes translation towards Y axis)
- $Z_{new} = Z_{old} + T_z$  (This denotes translation towards Z axis)

In Matrix form, the above translation equations may be represented as-

$$\begin{bmatrix} X_{new} \\ Y_{new} \\ Z_{new} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & T_x \\ 0 & 1 & 0 & T_y \\ 0 & 0 & 1 & T_z \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{old} \\ Y_{old} \\ Z_{old} \\ 1 \end{bmatrix}$$

**Rotation:** In Computer graphics, 3D Rotation is a process of rotating an object with respect to an angle in a three dimensional plane.

Consider a point object O has to be rotated from one angle to another in a 3D plane.

Let-

- Initial coordinates of the object O =  $(X_{old}, Y_{old}, Z_{old})$
- Initial angle of the object O with respect to origin =  $\Phi$
- Rotation angle =  $\theta$
- New coordinates of the object O after rotation =  $(X_{new}, Y_{new}, Z_{new})$

In 3 dimensions, there are 3 possible types of rotation-

- X-axis Rotation
- Y-axis Rotation
- Z-axis Rotation

**For X-Axis Rotation-** This rotation is achieved by using the following rotation equations-

- $X_{\text{new}} = X_{\text{old}}$
- $Y_{\text{new}} = Y_{\text{old}} \times \cos\theta - Z_{\text{old}} \times \sin\theta$
- $Z_{\text{new}} = Y_{\text{old}} \times \sin\theta + Z_{\text{old}} \times \cos\theta$

In Matrix form, the above rotation equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos\theta & -\sin\theta & 0 \\ 0 & \sin\theta & \cos\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

**For Y-Axis Rotation-** This rotation is achieved by using the following rotation equations-

- $X_{\text{new}} = Z_{\text{old}} \times \sin\theta + X_{\text{old}} \times \cos\theta$
- $Y_{\text{new}} = Y_{\text{old}}$
- $Z_{\text{new}} = Y_{\text{old}} \times \cos\theta - X_{\text{old}} \times \sin\theta$

In Matrix form, the above rotation equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} \cos\theta & 0 & \sin\theta & 0 \\ 0 & 1 & 0 & 0 \\ -\sin\theta & 0 & \cos\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

**For Z-Axis Rotation-** This rotation is achieved by using the following rotation equations-

- $X_{\text{new}} = X_{\text{old}} \times \cos\theta - Y_{\text{old}} \times \sin\theta$
- $Y_{\text{new}} = X_{\text{old}} \times \sin\theta + Y_{\text{old}} \times \cos\theta$
- $Z_{\text{new}} = Z_{\text{old}}$

In Matrix form, the above rotation equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} \cos\theta & -\sin\theta & 0 & 0 \\ \sin\theta & \cos\theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

**3D Scaling in Computer Graphics-** In computer graphics, scaling is a process of modifying or altering the size of objects.

- Scaling may be used to increase or reduce the size of object.
- Scaling subjects the coordinate points of the original object to change.
- Scaling factor determines whether the object size is to be increased or reduced.
- If scaling factor  $> 1$ , then the object size is increased.
- If scaling factor  $< 1$ , then the object size is reduced.

Consider a point object O has to be scaled in a 3D plane.

Let-

- Initial coordinates of the object  $O = (X_{\text{old}}, Y_{\text{old}}, Z_{\text{old}})$
- Scaling factor for X-axis =  $S_x$
- Scaling factor for Y-axis =  $S_y$
- Scaling factor for Z-axis =  $S_z$
- New coordinates of the object O after scaling =  $(X_{\text{new}}, Y_{\text{new}}, Z_{\text{new}})$

This scaling is achieved by using the following scaling equations-

- $X_{\text{new}} = X_{\text{old}} \times S_x$
- $Y_{\text{new}} = Y_{\text{old}} \times S_y$
- $Z_{\text{new}} = Z_{\text{old}} \times S_z$

In Matrix form, the above scaling equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} S_x & 0 & 0 & 0 \\ 0 & S_y & 0 & 0 \\ 0 & 0 & S_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

### **3D Reflection in Computer Graphics-**

Reflection is a kind of rotation where the angle of rotation is 180 degree.

The reflected object is always formed on the other side of mirror.

The size of reflected object is same as the size of original object.

Consider a point object O has to be reflected in a 3D plane.

Let-

- Initial coordinates of the object O =  $(X_{\text{old}}, Y_{\text{old}}, Z_{\text{old}})$
- New coordinates of the reflected object O after reflection =  $(X_{\text{new}}, Y_{\text{new}}, Z_{\text{new}})$

In 3 dimensions, there are 3 possible types of reflection-

- Reflection relative to XY plane
- Reflection relative to YZ plane
- Reflection relative to XZ plane

**Reflection Relative to XY Plane:** This reflection is achieved by using the following reflection equations-

- $X_{\text{new}} = X_{\text{old}}$
- $Y_{\text{new}} = Y_{\text{old}}$
- $Z_{\text{new}} = -Z_{\text{old}}$

In Matrix form, the above reflection equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

**Reflection Relative to YZ Plane:** This reflection is achieved by using the following reflection equations-

- $X_{\text{new}} = -X_{\text{old}}$
- $Y_{\text{new}} = Y_{\text{old}}$
- $Z_{\text{new}} = Z_{\text{old}}$

In Matrix form, the above reflection equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} -1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

**Reflection Relative to XZ Plane:** This reflection is achieved by using the following reflection equations-

- $X_{\text{new}} = X_{\text{old}}$
- $Y_{\text{new}} = -Y_{\text{old}}$
- $Z_{\text{new}} = Z_{\text{old}}$

In Matrix form, the above reflection equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

**3D Shearing in Computer Graphics-** In Computer graphics, 3D Shearing is an ideal technique to change the shape of an existing object in a three dimensional plane.

In a three dimensional plane, the object size can be changed along X direction, Y direction as well as Z direction.

So, there are three versions of shearing-

1. Shearing in X direction
2. Shearing in Y direction
3. Shearing in Z direction

Consider a point object O has to be sheared in a 3D plane.

Let-

- Initial coordinates of the object O =  $(X_{old}, Y_{old}, Z_{old})$
- Shearing parameter towards X direction =  $Sh_x$
- Shearing parameter towards Y direction =  $Sh_y$
- Shearing parameter towards Z direction =  $Sh_z$
- New coordinates of the object O after shearing =  $(X_{new}, Y_{new}, Z_{new})$

**Shearing in X Axis-** Shearing in X axis is achieved by using the following shearing equations-

- $X_{new} = X_{old}$
- $Y_{new} = Y_{old} + Sh_y \times X_{old}$
- $Z_{new} = Z_{old} + Sh_z \times X_{old}$

In Matrix form, the above shearing equations may be represented as-

$$\begin{bmatrix} X_{new} \\ Y_{new} \\ Z_{new} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ Sh_y & 1 & 0 & 0 \\ Sh_z & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{old} \\ Y_{old} \\ Z_{old} \\ 1 \end{bmatrix}$$

**Shearing in Y Axis-** Shearing in Y axis is achieved by using the following shearing equations-

- $X_{new} = X_{old} + Sh_x \times Y_{old}$
- $Y_{new} = Y_{old}$

- $Z_{\text{new}} = Z_{\text{old}} + Sh_z \times Y_{\text{old}}$

In Matrix form, the above shearing equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & Sh_x & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & Sh_z & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

**Shearing in Z Axis-** Shearing in Z axis is achieved by using the following shearing equations-

- $X_{\text{new}} = X_{\text{old}} + Sh_x \times Z_{\text{old}}$
- $Y_{\text{new}} = Y_{\text{old}} + Sh_y \times Z_{\text{old}}$
- $Z_{\text{new}} = Z_{\text{old}}$

In Matrix form, the above shearing equations may be represented as-

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & Sh_x & 0 \\ 0 & 1 & Sh_y & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$